

CIRCULATING PUMPS





Schuller GPD40-4SFC Cast Iron Circulator

10' of power cable included
 Motor: 2-pole single phase 115 VAC 60 Hz asynchronous squirrel-cage PSC
 Stator and rotor: stainless steel shielded wet
 Capacitor: 20 uf/200V
 Body Material: Cast Iron
 Pumped liquid temperature: 32°F -230°F (0°C - 110°C)
 Max pressure: 145psi (1MPa)
 Max flow: 62 gpm
 Max head 14 ft

Data Sheet

Model	Volts	Amps at High/ Med/Low Speeds	Watts at High/ Med/Low Speeds	System	Grundfos Equivalent
GPD40-4SFC	115 V	1.8/1.7/1.2	200/190/135	Closed	UPS 43-44 FC

Liquid Temperature	≥185°F (85°C)	≥194°F (90°C)	≥230°F (110°C)
Inlet Pressure	2 ft (0.6m) Head	10 ft (3m) Head	33 ft (10m) Head
	0.7 psi (0.05 bar)	4 psi (0.28 bar)	14.5 psi (1 bar)

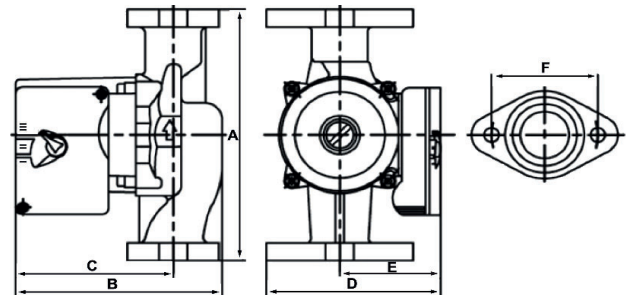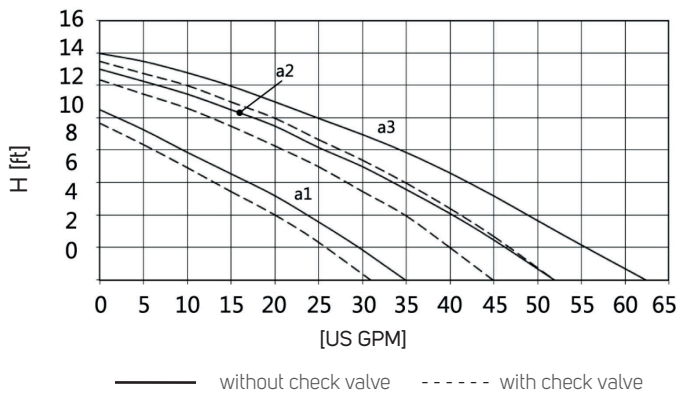

Model	A	B	C	D	E	F - Connection	Shipping Weight
GPD40-4SFC	8 1/2"	6 11/16"	5 1/8"	5 5/8"	3 1/4"	3 7/16" - GF 40 flange	13.5 lbs