



**Schuller 1-1/4" Stainless Steel Manifolds**


Max Flow Rate: 18 gpm Trunk, 1.5 gpm Circuit  
 Maximum Temperature: 194F at 43.8 psi  
 Maximum Pressure: 145 psi at 68F

**Included are:**

- Manifold
- 2 x Air vents and drains
- 2 x 1 - 1/4" End caps
- 1 x 1- 1/4" Isolation ball valve
- 1 x 1 - 1/4" Y-strainer isolation ball valve
- 3/4" Compression adapters
- Taconova flow meters
- Schuller thermal actuator compatible circuit valves

Type	1-1/4" Manifold
Material	SEA 304 Stainless Steel
Warranty	10 Years
Circuit Size	9 to 12 Loops
PEX Size	1/2" or 3/4"
Supply Thread	DN 32, 1 - 1/4"
Loop Thread	20 mm
Application	Radiant Heating
Fitting System	PEX Compression
Tubing	PEX
Test Pressure	145 psi
Flow Capacity CV	1.1 (Loop)
Max. Operating Temp.	194°F at 44 psi
Max. Operating Pressure	44 psi at 194°F
	87 psi at 158°F
	145 psi at 68°F

## 1-1/4" STAINLESS STEEL MANIFOLDS

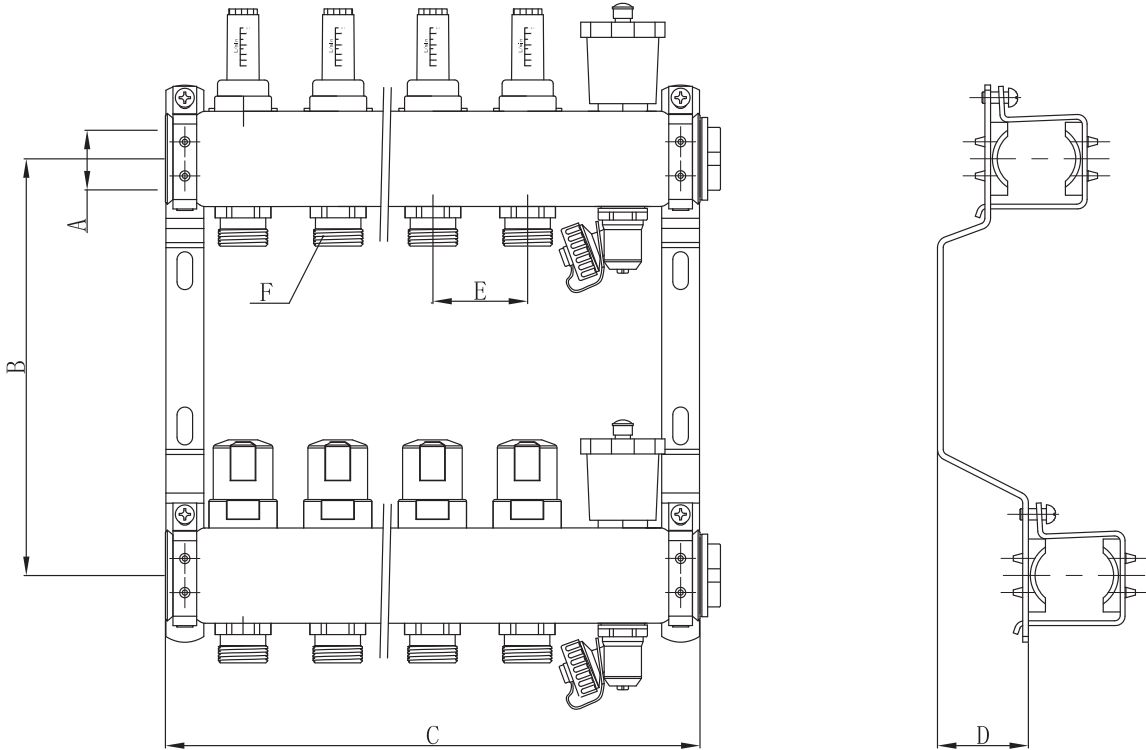

### Available Loop Sizes

Model Number	Circuit Size	A	B	C	D	E	F
MAN-125-9	9 Loops	1-1/4"	8-1/2"	20-5/8"	2"	2"	3/4"x18TPI
MAN-125-10	10 Loops	1-1/4"	8-1/2"	22-5/8"	2"	2"	3/4"x18TPI
MAN-125-11	11 Loops	1-1/4"	8-1/2"	24-5/8"	2"	2"	3/4"x18TPI
MAN-125-12	12 Loops	1-1/4"	8-1/2"	26-5/8"	2"	2"	3/4"x18TPI