

Schuller 1" Stainless Steel Manifolds


Schuller™ 1" 304 food grade stainless steel manifolds with Taconova flow meters, mounting brackets and 1" threaded ends.
 Flow Rate: 14 gpm Trunk, 1.5 gpm Circuit
 Maximum Temperature: 194F at 43.8 psi
 Maximum Pressure: 145 psi at 68F

In the package you will find:

- Manifold with flow meters and loop valves
- PEX Adapters of your selection
- Mounting brackets
- 2 x 1" End Plugs
- 1 x 1" End Cap
- 1 x Air Vent With Drain
- 2 x 1" Ball Valves (1 Red 1 Blue)
- Schuller thermal actuator compatible circuit valves

Type	1" Manifold
Material	SEA 304 Stainless Steel
Warranty	10 Years
Circuit Size	2 to 12 Loops
PEX Size	1/2" or 3/4"
Supply Thread	DN 25, 1"
Loop Thread	20 mm
Application	Radiant Heating
Fitting System	PEX Compression
Tubing	PEX
Test Pressure	145 psi
Flow Capacity CV	1.1 (Loop)
Max. Operating Temp.	194°F at 44 psi
Max. Operating Pressure	44 psi at 194°F
	87 psi at 158°F
	145 psi at 68°F

1" STAINLESS STEEL MANIFOLDS

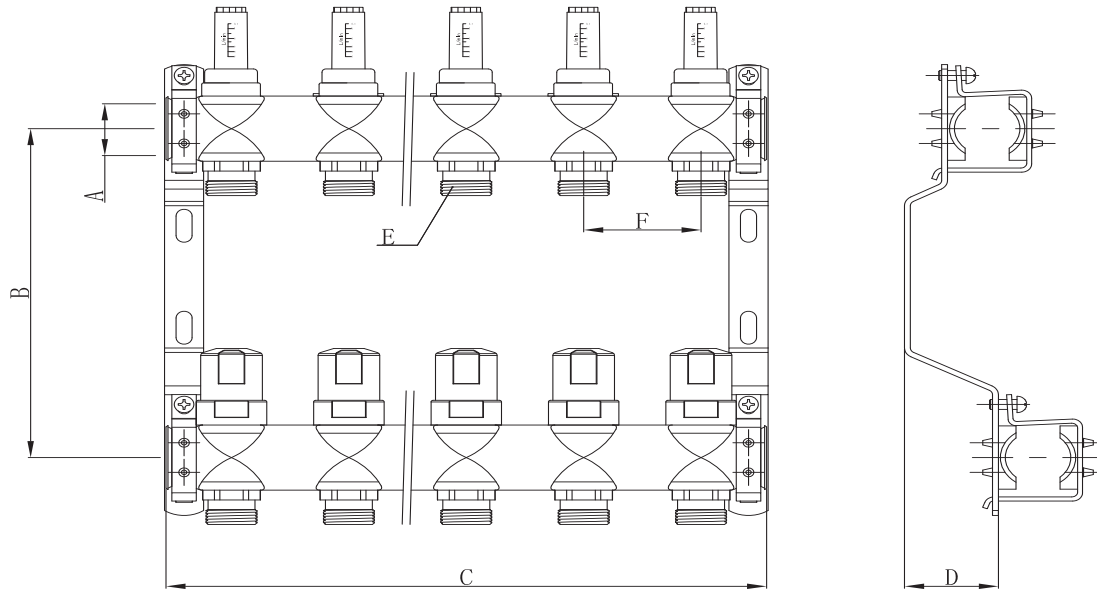

Available Loop Sizes

Model Number	Circuit Size	A	B	C	D	E	F
MAN-125-2	2 Loops	1"	8"	5- ¹ / ₆ "	1- ³ / ₄ "	³ / ₄ " x 18TPI	2- ³ / ₈ "
MAN-125-3	3 Loops	1"	8"	7- ³ / ₈ "	1- ³ / ₄ "	³ / ₄ " x 18TPI	2- ³ / ₈ "
MAN-125-4	4 Loops	1"	8"	9- ³ / ₄ "	1- ³ / ₄ "	³ / ₄ " x 18TPI	2- ³ / ₈ "
MAN-125-5	5 Loops	1"	8"	12"	1- ³ / ₄ "	³ / ₄ " x 18TPI	2- ³ / ₈ "
MAN-125-6	6 Loops	1"	8"	14- ³ / ₈ "	1- ³ / ₄ "	³ / ₄ " x 18TPI	2- ³ / ₈ "
MAN-100-7	7 Loops	1"	8"	16- ³ / ₄ "	1- ³ / ₄ "	³ / ₄ " x 18TPI	2- ³ / ₈ "
MAN-100-8	8 Loops	1"	8"	19"	1- ³ / ₄ "	³ / ₄ " x 18TPI	2- ³ / ₈ "
MAN-100-9	9 Loops	1"	8"	21- ³ / ₈ "	1- ³ / ₄ "	³ / ₄ " x 18TPI	2- ³ / ₈ "
MAN-100-10	10 Loops	1"	8"	23- ³ / ₄ "	1- ³ / ₄ "	³ / ₄ " x 18TPI	2- ³ / ₈ "
MAN-100-11	11 Loops	1"	8"	26"	1- ³ / ₄ "	³ / ₄ " x 18TPI	2- ³ / ₈ "
MAN-100-12	12 Loops	1"	8"	28- ³ / ₈ "	1- ³ / ₄ "	³ / ₄ " x 18TPI	2- ³ / ₈ "